


SmartStick+ G2 Configuration

1. Using a PC, tablet, or phone, open a browser and enter find.homeseer.com in the URL line. Then click the **Search...** button. When the results appear, click the IP address hyperlink in the System column to access your HomeTroller, HS3, or HS4 software system.
2. Open the **PLUG-INS** drop menu, then **Z-Wave**, then click **Controller Management**. Click the **Add Interface** button.
3. Name your SmartStick+, select the SmartStick+ as the device type and then correct COM port.
4. Finally, click the yellow and red disabled button to enable your new SmartStick+. A green enabled button should now appear.

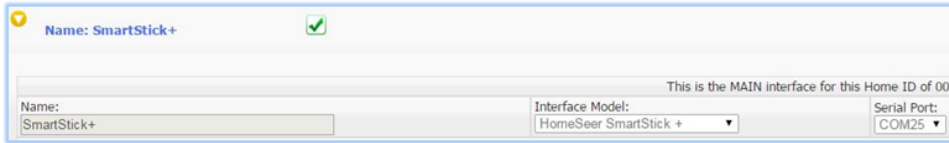

The screenshot shows a configuration window for a SmartStick+ interface. At the top, it says "Name: SmartStick+" with a green checkmark icon. Below this, there is a text area with the message "This is the MAIN interface for this Home ID of 00:". Underneath, there are three fields: "Name:" with the value "SmartStick+", "Interface Model:" with a dropdown menu showing "HomeSeer SmartStick +", and "Serial Port:" with a dropdown menu showing "COM25".

5. If you're building a Z-Wave network from scratch, refer to your platform documentation for information on setting up your Z-Wave network and skip the Restore Z-Wave Network to SmartStick+ step. If you're upgrading from another interface, proceed to Restore Z-Wave Network to SmartStick+.